



PHANTOM TMX

7510 UV

6410 UV

5010 UV



HIGH-SPEED
UV-VIS CAMERAS

High QE in UV and Visible wavelengths
Up to 76,000 fps at 1280 x 800 (7510),
over 300,000 fps at 1280 x 192 and 640 x 384

FEATURES & BENEFITS

BRINGING HIGH SPEED TO UV APPLICATIONS

- TMX UV cameras achieve up to over 70% QE at 300nm wavelength while offering the same frame rates and features as the standard TMX cameras
- Dual purpose: Phantom UV cameras have similar QE performance in the visible and near-IR wavelengths as their standard counterparts.

FOCUS ON DATA MANAGEMENT

- Record multiple experiments with up to 512GB of memory that can be partitioned up to 511 times.
- 10Gb Ethernet is standard for the fastest data download directly from the camera's RAM buffer.
- Use the Phantom CineMag 5e, for up to 8TB of nonvolatile memory and fast image transfer.

**with export controlled FAST options*

IMAGE & SENSITIVITY

Sensor Type	CMOS, Back Side Illuminated (BSI), with fused silica Global shutter Available in monochrome only	
Maximum Resolution	1280 x 800	Binned 640 x 384
CAR Increments	256 x 32	Binned 128 x 64
Pixel Size	18.5 μm	Binned 37 μm
Sensor Size	23.7 x 15.4 mm	
Bit Depth	12 bit	
	EMVA 1288 Measurements (at 532 nm)	
	Standard Mode	Binned Mode
Quantum Efficiency %	77.6%	72.0%
Max. SNR (dB)	39.4	45.2
Absolute Sensitivity Threshold (p)	31.8	98.9
Saturation Capacity (e ⁻)	8736	33,184
Temporal Dark Noise (e ⁻)	24.18	70.69
Dynamic Range (dB)	51.0	53.4

- Reported measurements were taken at 532 nm with monochrome camera, using the EMVA 1288 3.1 standard


- Visit: www.phantomhighspeed.com/emva for more information on EMVA 1288



Back Panel

SPECTRAL RESPONSE

Quantum Efficiency Monochrome

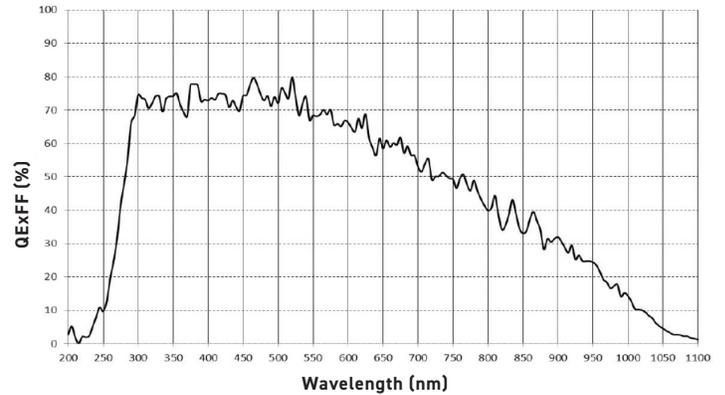

CONNECTIVITY & SIGNALS

Ethernet	10Gb and Gigabit standard	
Timecode	IRIG-B modulated and un-modulated	
Port Descriptions	Ethernet	Locking RJ45
	Power	Fischer 3-pin
	Battery back-up	Fischer 3-pin
	VF (View Finder) Power	Hirose 4-pin
	Range Data	Fischer 8-pin
	Remote	Fischer 5-pin
	GPS	Fischer 6-pin
	Capture	Fischer 12-pin
	USB	Yes for WiFi dongle
	Video output	3G-SDI (2 BNCs)
Dedicated BNC	Trigger, Timecode-in, 3G-SDI	
Programmable I/O BNC	4 ports	
I/O Signals	Programmable I/O for Fsync, Strobe, Ready, Timecode-out, Event, Memgate, Pretrigger. Assign and define signals in PCC	
Hardware Trigger	Dedicated BNC	
Software Trigger	Trigger Button, via PCC over Ethernet, Remote Port, via Image-based auto trigger (IBAT)	
Synchronization	External Sync via FSync or IRIG Timecode	
Recording Features	Burst mode, Continuous recording & AutoSave to CineMag	
Video Output	3G-SDI	
Accessory Power	4-pin Hirose for 12V monitors up to 1 Amp	



MEMORY & STORAGE	
RAM Buffer	128GB, 256GB, 512GB RAM options
Multi-Cine	Up to 511 Partitions
Non-Volatile Media	Phantom CineMag 5e optional. Supports auto-save, direct record and video playback.
Media Transfer Rates	2TB CineMag 5e = 1,000 Mpx/sec 8TB CineMag 5e = 1,200 Mpx/sec

FRAME RATES & EXPOSURE			
Top FPS at Max Resolution	7510: 76,000	6410: 65,940	5010: 50,725
Maximum FPS	7510: 744,670 1,750,000 with FAST options*	6410: 736,280 1,516,660 with FAST options*	5010: 583,330 1,166,660 with FAST option*
Minimum FPS	100		
Minimum Exposure (Standard)	7510: 1.04 µs	6410: 1.04 µs	5010: 1.1 µs
Minimum Exposure (FAST)	95ns with 95ns FAST option* 38ns with 38ns FAST option* (TMX 7510 / 6410)		
PIV Features	Shutter-off mode with a straddle time of 229ns Supports Burst Mode		
Exposure Features	Extreme Dynamic Range (EDR), Auto Exposure		

FRAME RATE CHART

Table provides examples of common resolutions and frame rates. The record times shown are for 256GB RAM at the frame rate shown. Duration will be 1/2 for 128GB and double for 512GB.

MAXIMUM FRAME RATE - FPS; (256GB RECORD TIME - SEC)						
Resolution (H x V)	TMX-7510		TMX-6410		TMX-5010	
	Standard	Binned	Standard	Binned	Standard	Binned
1280 x 800	76,000 (2.2)		65,940 (2.5)		50,725 (3.3)	
1280 x 640	94,590 (2.2)		81,980 (2.5)		63,060 (3.3)	
1280 x 480	126,500 (2.2)		109,630 (2.5)		84,330 (3.3)	
1280 x 448	134,610 (2.2)		116,660 (2.5)		89,740 (3.3)	
1280 x 384	156,710 (2.2)		135,820 (2.5)		104,470 (3.3)	
1280 x 320	187,500 (2.2)		162,500 (2.5)		125,000 (3.3)	
1280 x 256	233,330 (2.2)		202,220 (2.5)		155,550 (3.3)	
1280 x 192	308,820 (2.2)		267,640 (2.5)		205,880 (3.3)	
640 x 384		308,820 (2.2)		267,640 (2.5)		205,880 (3.3)
1280 x 160	375,000 (2.2)		325,000 (2.5)		250,000 (3.3)	
640 x 320		375,000 (2.2)		325,000 (2.5)		250,000 (3.3)
1280 x 128	456,520 (2.2)		395,650 (2.6)		304,340 (3.4)	
640 x 256		456,520 (2.2)		395,650 (2.6)		304,340 (3.4)
1280 x 96	617,640 (2.2)		535,290 (2.6)		411,760 (3.3)	
640 x 192		617,640 (2.2)		535,290 (2.6)		411,760 (3.3)
1280 x 64	744,670 (2.9)		736,280 (2.9)		583,330 (3.5)	
640 x 128		744,670 (2.9)		736,280 (2.9)		583,330 (3.5)
FAST OPTION						
1280 x 64	875,000 (2.3)		758,330 (2.7)		583,330 (3.5)	
640 x 128		875,000 (2.3)		758,330 (2.7)		583,330 (3.5)
1280 x 32	1,750,000 (2.3)		1,516,660 (2.7)		1,166,660 (3.5)	
640 x 64		1,750,000 (2.3)		1,516,660 (2.7)		1,166,660 (3.5)

*Certain Phantom cameras are held to export licensing standards. Details available at: www.phantomhighspeed.com/export

CONTROL

Software & OS	Phantom PCC (Windows 64); SDK available for C/C++, C#, Python, MatLab and LabView
On-camera Controls	Standard Feature. Access menu system with encoder, viewed on video monitor. Buttons for trigger, play and save
Primary File Format	Phantom Cine RAW (.cine)
Alternative File Formats	Easily convert to formats including .mp4, Apple ProRes .mov, .avi, Tiff, JPG, PNG and many more using PCC. Cine files are directly compatible with many major video editing and motion analysis programs
Highlighted Software Features	Integrated Data Acquisition (NI-DAQ), DIC Calibration Support with Sync-Snapshot menu, Continuous recording, Image Processing

MECHANICAL

Housing Variants	CineMag and non-CineMag compatible variants
Size (Without Handle)	Non-CineMag: 7 x 7 x 11.7" (17.8 x 17.8 x 29.7 cm) CineMag: 7 x 7.4 x 11.7" (17.8 x 18.6 x 29.7 cm)
Weight	20 lbs (9.1 kg)
Lens Mounts	F-Mount standard (aperture support for Nikon G-style lenses). Also available: Canon EF (with electronic focus and iris control), C-mount, M42-Mount
Mounting Points	2 (4 total) on the bottom, 2 (4 total) on side, 4 (8 total) on handle
Internal Shutter	Standard, for remote black references
Cooling	Active cooling. Quiet mode disables fans during capture

POWER

AC Power	100-240 VAC, 400W power supply included
Voltage Range	20-28VDC Primary and Secondary
Power Consumption	325W typical, 395W maximum with accessories (Max frame rate, CineMag, View Finder, Remote)



ENVIRONMENTAL

Operating Temperature	-10 to +50°C
Storage Temperature	-20 to +70°C
Operational Shock	Rated 30G; sawtooth wave, 11ms, +/- 10 pulses all axes
Operational Vibration	MIL-STD-202H Method 214-i; Test Condition A. Rated 5.3 Grms; 15 min/axis
Regulatory	Emissions - CE & UKCA Compliant EN 61326-1 Immunity - CE & UKCA Compliant EN 61326-1 FCC - CFR 47, Part 15, Subpart B & ICES-0003, Class A KC Emissions - KC Compliant KN32 KC Immunity - KC Compliant KN35 Safety - IEC 60950-1

SERVICES AND SUPPORT NETWORK

Phantom cameras are supported by Vision Research's Global Service and Support network, providing PhantomCare services from multiple sites around the globe.

Contact us about training courses and application services applying both simple and advanced high-speed scientific imaging techniques.

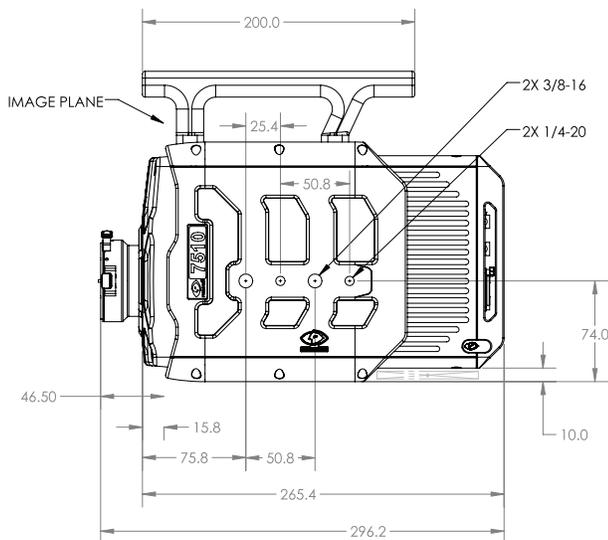

ABOUT VISION RESEARCH

Focused. Since 1950, Vision Research has been designing, and manufacturing high-speed cameras. Our single focus is to invent, build, and support the most advanced cameras possible.



100 Dey Road
Wayne, NJ 07470 USA
+1.973.696.4500