
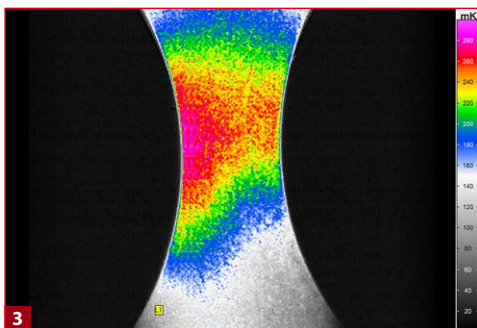


ImageIR® 8300

High-end Thermography Camera

INFRA^{TEC}.

Europe's leading specialist for infrared sensors and measurement technology

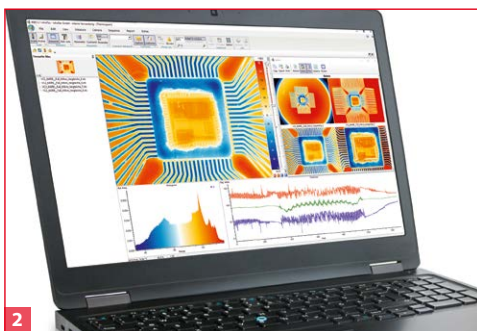

- 1) ImageIR® 8300 with interchangeable lenses from InfraTec
- 2) Software IRBIS® 3
- 3) Thermal Stress Analysis with Lock-in Thermography



www.InfraTec.eu

www.InfraTec-infrared.com

Made in Germany



Spectral range	(2.0 ... 5.7) μm
Pitch	15 μm
Detector	MCT or InSb
Detector format (IR pixels)	(640 x 512)
Image acquisition	Snapshot
Readout mode	ITR/IWR
Aperture ratio	f/3.0 or f/2.0
Detector cooling	Stirling cooler
Temperature measuring range	(-40 ... 1,500) $^{\circ}\text{C}$, up to 3,000 $^{\circ}\text{C}^*$
Measurement accuracy	$\pm 1^{\circ}\text{C}$ or $\pm 1\%$
Temperature resolution @ 30 $^{\circ}\text{C}$	Better than 0.02 K
Frame rate (full / half / quarter / sub frame)*	Up to 125 / 404 / 1,051 / 2,996 Hz
Window mode	Yes
Focus	Manual, motorised or automatically*
Dynamic range	Up to 16 bit*
Integration time	(0.6 ... 20,000) μs
Rotating filter wheel*	Up to 5 positions
Rotating aperture wheel*	Up to 5 positions
Interfaces	GigE, CAMLink*, HDMI*
Trigger	3 IN / 2 OUT, TTL
Tripod adapter	1/4" and 3/8" photo thread, 2 x M5
Power supply	24 V DC, wide-range power supply (100 ... 240) V AC
Storage and operation temperature	(-40 ... 70) $^{\circ}\text{C}$, (-20 ... 50) $^{\circ}\text{C}$
Protection degree	IP54, IEC 60529
Dimensions; weight	(235 x 120 x 160) mm*; 3.3 kg (without lens)
Further functions	Multi Integration Time*
Analysis and evaluation software	IRBIS [®] 3, IRBIS [®] 3 view, IRBIS [®] 3 plus*, IRBIS [®] 3 professional*, IRBIS [®] 3 control*, IRBIS [®] 3 online*, IRBIS [®] 3 process*, IRBIS [®] 3 active*, IRBIS [®] 3 mosaic*, IRBIS [®] 3 vision*

* Depending on model

With its ImagerIR[®] 8300, InfraTec introduces another top level thermographic camera model belonging to the ImagerIR[®] high-end camera series. The implementation of a **(640 x 512) IR pixel MWIR detector** allows **125 Hz full-frame** real-time imaging without compromising any thermal accuracy. The ImagerIR[®] 8300 and its cooled focal-plane array photon detector reach an outstanding **thermal resolution better than 0.02 K**. The new version was developed for most demanding operations in research and development and process monitoring fields. Its **modular structure consisting of the optical, detector and interface section**, makes the camera easily compatible to the related applications and for tailored configurations. An **integrated trigger interface** guarantees a repeatable high-precision triggering of quick procedures. **Multiple configurable digital inputs and outputs** serve as control ports for the camera or as generator of digital control signals for external devices.

The optical channel consists of the **exchangeable infrared lens** as well as application-specific apertures, filters and reference elements. All exchangeable ImagerIR[®] 8300 standard lenses can be **equipped with a motorised focus unit** easily operable from the camera's application software. It allows **precise, fast and remotely controlled motorised focusing** and is part of the autofocus function.

Lenses	Focal length (mm)	FOV ($^{\circ}$)	IFOV (mrad)
Wide-angle lens	12	(43.6 x 35.5)	1.3
Standard lens	25	(21.7 x 17.5)	0.6
Telephoto lens	50	(11.0 x 8.8)	0.3
Telephoto lens	100	(5.5 x 4.4)	0.15
Telephoto lens	200	(2.7 x 2.2)	0.08

Macro and Microscopic lenses	Minimum object distance (mm)	Object size (mm)	Pixel size (μm)
Close-up for telephoto lens 50 mm	300	(58 x 46)	90
Close-up for telephoto lens 100 mm	500	(48 x 38)	75
Microscopic lens M=1.0x	40 / 195 / 300	(9.6 x 7.7)	15
Microscopic lens M=3.0x	22	(3.2 x 2.6)	5
Microscopic lens M=8.0x	14	(1.2 x 0.96)	1.9

Headquarters

InfraTec GmbH
Infrarotsensorik und Messtechnik
 Gostritzer Str. 61 – 63
 01217 Dresden / GERMANY
 Phone +49 351 871-8630
 Fax +49 351 871-8727
 E-mail thermo@InfraTec.de

USA office

InfraTec infrared LLC
 5048 Tennyson Pkwy.
 Plano TX 75024 / USA
 Phone +1 844-226-3722 (toll free)
 E-mail thermo@InfraTec-infrared.com